



# APX-15 UAV

## VERSION 3 , SINGLE BOARD GNSS-INERTIAL SOLUTION

The Trimble APX-15 UAV is a GNSS-Inertial OEM solution designed to reduce the cost and improve the efficiency of mapping from small Unmanned Aerial Vehicles (UAVs). Comprised of a small single OEM board containing a precision GNSS receiver and inertial sensor components plus post-mission Differential GNSS-Inertial office software, the Trimble APX-15 UAV eliminates the need to survey extensive Ground Control Points (GCP's), and reduces the amount of sidelap required to be flown, thus increasing the area flown per mission.

### HIGH ACCURACY, EXTREMELY SMALL PACKAGE


Measuring just 60 x 67 mm and weighing only 60 grams, the Applanix APX-15 UAV provides unparalleled performance in an extremely small package. And with the included POSPac UAV post-mission software, it produces a highly accurate position and orientation solution for direct georeferencing of cameras, LiDARs and other UAS sensors.

### THE APX-15 UAV BRINGS ALL THE BENEFITS OF DIRECT GEOREFERENCING TO UAV PLATFORMS:

- ▶ Turn your UAV into a professional mapping solution
- ▶ Ultra-fast image georeferencing for faster map production and delivery
- ▶ Reduced number of ground control points, saving time and money
- ▶ Consistent, reliable, highly accurate results
- ▶ Increased collection area per flight for greater productivity
- ▶ Redundant navigation solution to autopilot for enhanced safety

### Key Features

- ▶ High-performance Direct Georeferencing solution for improved efficiency and accuracy of mapping from small Unmanned Aerial Vehicles
  - Reduce/eliminate GCP's
  - Reduce sidelap
  - Accurate LiDAR georeferencing
- ▶ Compact single-board OEM module complete with survey-grade multifrequency GNSS receiver and MEMS inertial components
- ▶ Applanix IN-Fusion™ GNSS-Inertial and SmartCal™ compensation technology
- ▶ POSPac UAV Differential GNSS Inertial post-processing software for highest accuracy
- ▶ RTK real-time position for precision landing applications
- ▶ Supports all common RTK corrections such as CMR, CMR+, RTCM

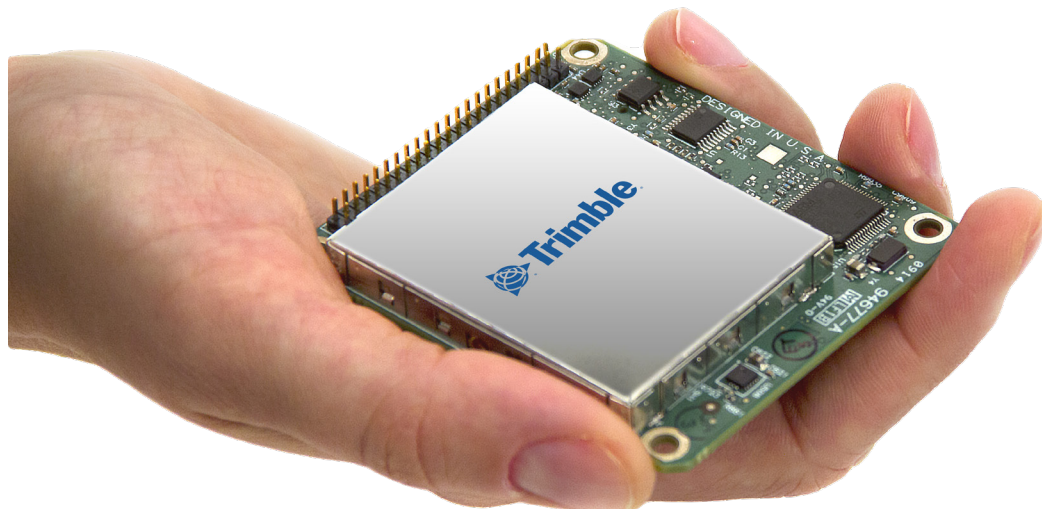

## TECHNICAL SPECIFICATIONS

### System Summary

- Advanced Applanix IN-Fusion™ GNSS-Inertial integration technology
- Solid-state MEMS inertial sensors with Applanix SmartCal™ compensation technology
- Advanced Trimble Maxwell Custom GNSS survey technology
- 336 Channels
  - GPS: L1 C/A, L2C, L2E, L5
  - GLONASS: L1 C/A, L2 C/A, L3 CDMA<sup>8</sup>
  - BeiDou: B1, B2
  - Galileo: E1, E5A, E5B, E5AltBOC
  - QZSS: L1 C/A, L1S, L1C, L2C, L5, LEX
  - SBAS: L1 C/A, L5
  - MSS L-band: Trimble RTX, OmniSTAR
- High precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurements data for low noise, low multipath error, low time domain correlation and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Proven Trimble low elevation tracking technology
- 100 Hz position, roll, pitch and heading output
- Generic Gimbal and Autopilot support
- IMU data rate 200 Hz
- Navigation output format: ASCII (NMEA-0183), Binary (Trimble GSOF)
- Supported Reference input: CMR, CMR+, sCMRx, RTCM 2.1, 2.2, 2.3, 3.0, 3.1
- Support for POSPac UAV post-processing software (included)
- No export permit required

### LAN INPUT/OUTPUT

All Ethernet functions are supported through dedicated IP address (Static or DNS) simultaneously.

TCP/IP and UDP ASCII and Binary data streaming (Time tag, PPS sync, status, position, attitude, velocity, track and speed, dynamics, performance metrics, GNSS data)

HTTP Web based Control software (GUI) for easy system configuration and low rate display. Support for all common browsers (IE, Safari, Mozilla, Google Chrome, Firefox)

### SERIAL INPUT/OUTPUT

RS232 level port  
TTL level (3.3 V) port  
Parameters ASCII and Binary data streaming (Time tag, PPS sync, status, position, attitude, velocity, track and speed, dynamics, performance metrics, GNSS data), reference input (CMR, CMR+, sCMRx, RTCM), configuration messages, Gimbal Encoder and Autopilot input support.

### OTHER INPUT/OUTPUT

PPS (pulse-per-second) Time Sync Pulse output  
Event Input (2) Two time mark of external events  
TTL 3.3 V pulses, max rate 50 Hz  
Digital I/O (3) LED drivers with dedicated functionality for systems integrators

## LOGGING

Internal Logging 6 GByte Flash memory  
External Logging USB 2.0 Device port  
Parameters Time tag, status, position, attitude, velocity, track and speed, dynamics, performance metrics, raw IMU data (200 Hz), raw GNSS data (5 Hz)

## PERFORMANCE SPECIFICATIONS<sup>2</sup> (RMS ERROR)

### Unmanned Airborne Vehicle Applications

	SPS	RTK <sup>4</sup>	PP-RTX <sup>9</sup>	Post-Processed <sup>5</sup>
Position (m)	1.5 - 3.0	0.02 - 0.05	0.03 - 0.06	0.02 - 0.05
Velocity (m/s)	0.05	0.02	0.015	0.015
Roll & Pitch (deg)	0.04	0.03	0.025	0.025
True Heading <sup>3</sup> (deg)	0.30	0.18	0.08	0.080

## PHYSICAL CHARACTERISTICS

Size ..... 67 L x 60 W x 15 H mm (nominal)  
Weight ..... 60 grams  
Power ..... Wide range input 9-30 V DC, typical power consumption of 3.5W at room temperature  
Connectors ..... I/O: 44 Pin Header Samtec TMM-122-03-S-S-MW (mating part FCI 90311-044LF)  
Antenna Port: ..... Connector: MMCX receptacle  
Output Voltage: 3.3 V DC to 5 V DC  
Maximum Current: 400 mA  
Minimum Input Signal Strength: 32 dB (>35 dB Recommended)

## ENVIRONMENTAL CHARACTERISTICS

Temperature: ..... -40 deg C to +75 deg C (Operational)  
..... -55 deg C to +85 deg C (Storage)  
Measurement Range: ..... +/- 6g<sup>6</sup>, +/- 300 dps  
Mechanical Shock: ..... +/- 75g Survival  
Operating Humidity: ..... 5% to 95% R.H. non-condensing at +60 deg C  
Maximum Operating Limits: ..... 515 m/sec  
18,000 m

## ADDITIONAL ACCESSORIES<sup>7</sup>

Evaluation Kit (Development Board)

## POSPAC UAV OFFICE SOFTWARE

- Post-processed Differential GNSS-Inertial SW for APX-15
- 200 Hz Navigation solution (Position, Velocity, Orientation, Rates, Accelerations)
- Applanix IN-Fusion GNSS-Integration technology
- Full support for UAV dynamic models
- Single Base Differential GNSS-Inertial processing
- Forward and reverse processing with optimal Smoother
- Support for Applanix SmartBase virtual reference station module<sup>7</sup>
- Support for PP-RTX<sup>9</sup>

Specifications subject to change without notice.

1 Developed under a License of the European Union and the European Space Agency  
2 Typical performance. Actual results are dependent upon satellite configuration, atmospheric conditions and other environmental effects  
3 Typical survey mission profile, max RMS error. Heading error will increase for low speed rotor applications and when hovering.  
4 Requires base station and radio link, sold separately  
5 POSPac UAV, short base line operation  
6 Sensor bandwidth (-3 dB amplitude) ~ 50 Hz  
7 Sold separately  
8 There is no official GLONASS L3CDMA or Galileo E6 ICD. The current tracking capability is based on publicly available information. Full receiver compatibility cannot be guaranteed.  
9 POSPac UAV/MMS, Post-processed CenterPoint® RTX™, typical mission performance subscription sold separately. The accuracy is subject to quality of GNSS, durational data set, and regional coverage.

TRIMBLE APPLANIX  
85 Leek Crescent  
Richmond Hill, Ontario  
L4B 3B3, Canada  
+1-289-695-6000 Phone

www.applanix.com  
airborne@applanix.com

© 2019, Trimble Inc. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Inc., registered in the United States and in other countries. Applanix and the Applanix logo are trademarks of Applanix Corporation, registered in the Canadian Patent and Trademark Office and other countries. InFusion and SmartBase are trademarks of Applanix Corporation. All other trademarks are the property of their respective owners. Information subject to change without notice.